



RUBY

132W compact beam light

RUBY is a compact beam light that harnesses all the power of its Osram Sirius 132W lamp into a tight, bright and sharp 2° beam. Designed to cut through even the brightest stage, the RUBY's clean and concentrated beam competes with much more powerful beam lights.

FEATURES

- 14 position colour wheel including CTC filters
- Compact and lightweight design for creative freedom and easy rigging
- Extensive effect options: frost, fixed gobo wheel and dual indexing with rotating prisms

Variants

RUBYBK
Black housing

RUBYWH
White housing

TECHNICAL SPECIFICATIONS

LIGHT SOURCE

- Source: 132W Osram Sirius HRI
- CT: 9200K
- CRI: 60
- Luminous flux: 5150lm
- Lux: 393000lux @5m

OPTICS

- Beam angle: 2°
- Lens diameter: 98mm
- Lens type: high-quality glass lens optics
- Focus: motorised

COLOUR SYSTEM

- CTC: on wheel 2500K and 3200K + CTB
- Colour wheel: 14 dichroic filters + open

DYNAMIC EFFECTS

- Fixed gobos: 17 fixed gobos + open
- Circular prism: 8f with bi-directional rotation, indexing
- Linear prism: 6f with bi-directional rotation, indexing
- Frost: frost unit to soften the beam edge

BODY

- Pan angle: 630-540°
- Tilt angle: 265°

CONTROL

- Protocols: DMX512, RDM
- DMX channels: 11 / 13 / 14 / 17channel
- W-DMX: optional, wireless solution receiver

ELECTRONICS



- Dimmer: linear 0~100% mechanical dimmer
- Strobe / shutter: 1-25 flash(s), mechanical

ELECTRICAL

- Power consumption (at 230V): 212W
- Output (at 230V): 8 units on a single power line

PHYSICAL

- Signal connection: Amphenol XLR 3p + 5p IN/OUT connectors
- Power connection: Neutrik powerCON IN/OUT connectors
- IP rating: 20
- Dimensions (WxHxD): 294x437x200mm
- Weight: 10.5kg

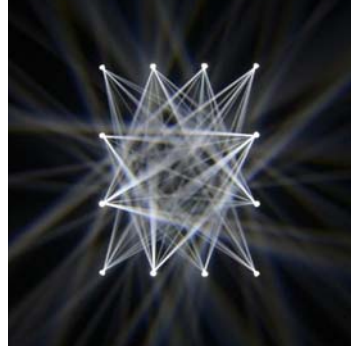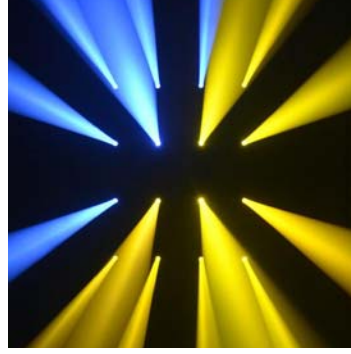

LIGHT SOURCE

132W Osram Sirius HRI



BEAM ANGLE

2° motorised



CONNECTIVITY

DMX512, RDM, W-DMX (optional)



IP RATING

20